MYLYR





ORA

CNC Edged Metal Tact Switch
Simplifying Complexity, Minimalist Aesthetics

ORA

Subvert Tradition · Simplify Integration

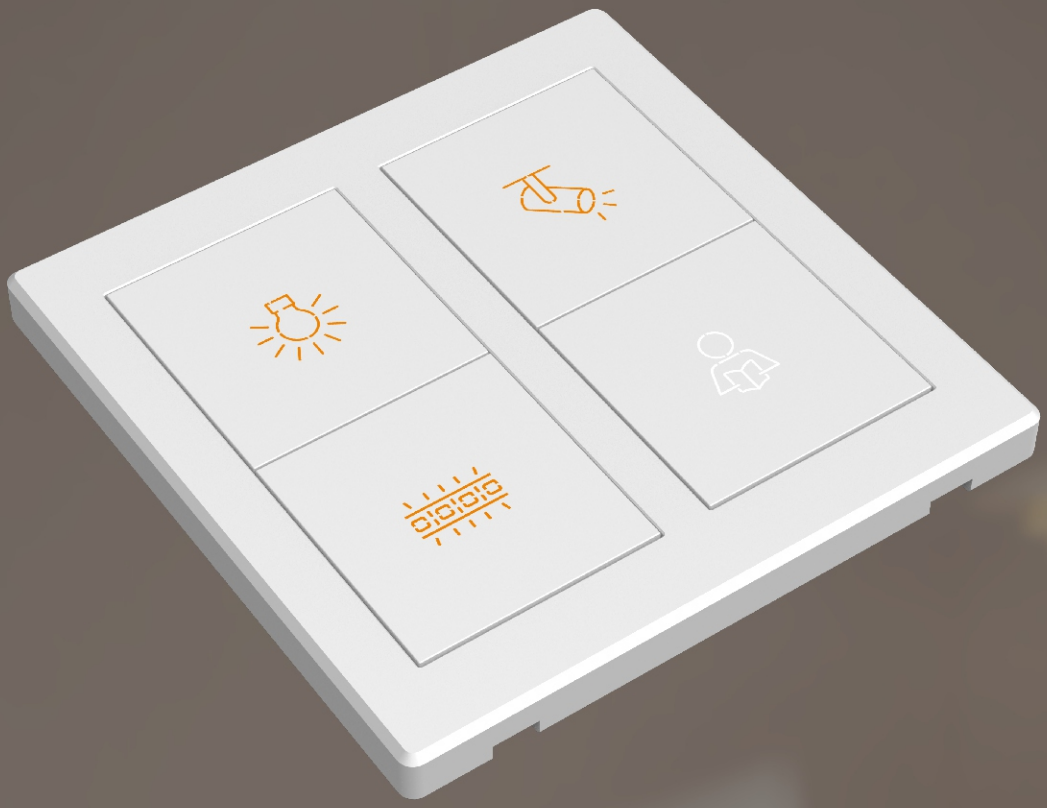



Light and Shadow Accompany Sleep

Select from a Variety of Colors

Frame Color:

- Spray White
- Spray Grey
- Spray Champagne
- Spray Black
- Brushed Grey
- Brushed Champagne(Code 2)
- Brushed Matte Black(Code 2)

Metal Button Color:

- Spray White
- Spray Grey
- Spray Champagne
- Spray Black
- Brushed Grey
- Brushed Champagne(Code 2)
- Brushed Matte Black(Code 2)

Plastic Button Color:

- Black



Spray White Metal Button Metal Frame

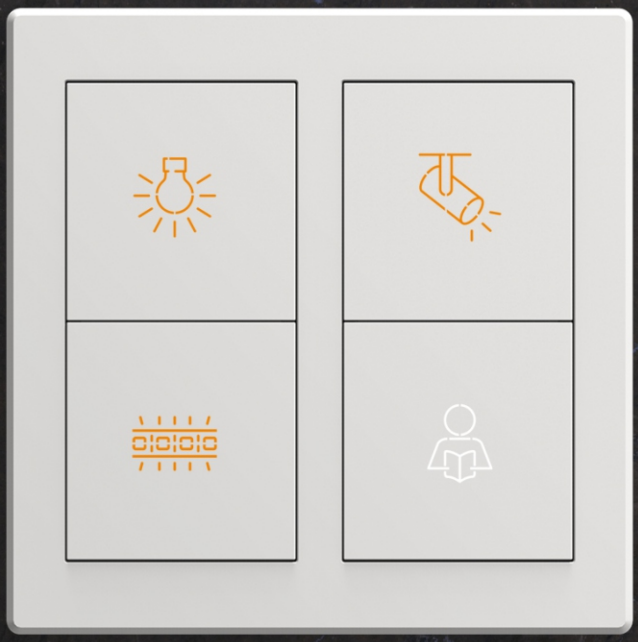

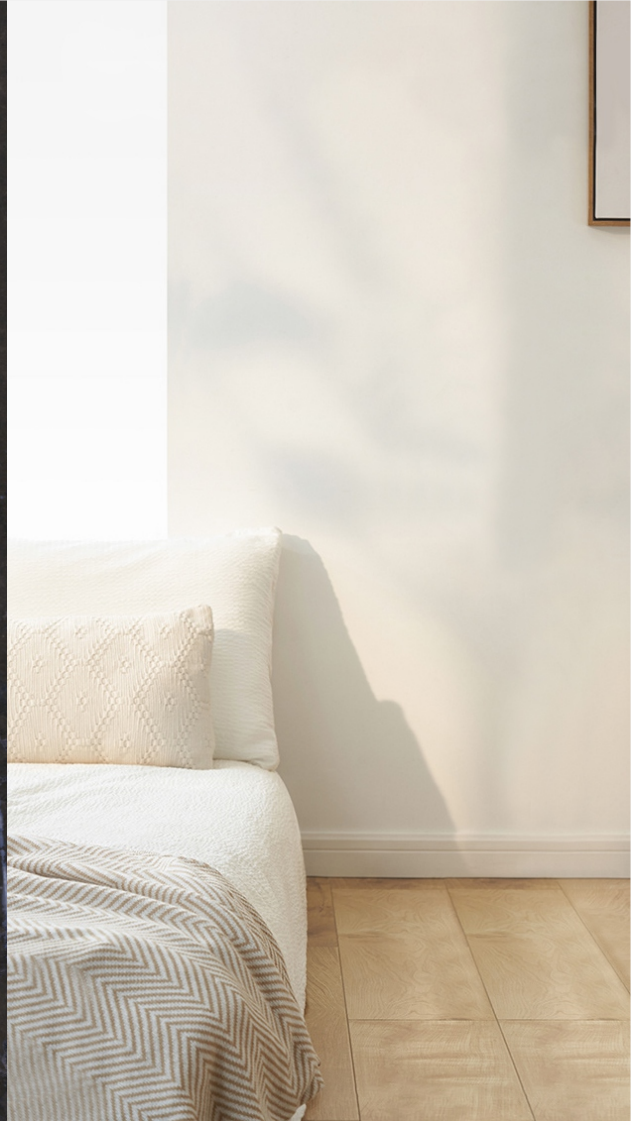



Spray Champagne Metal Button Metal Frame



Brushed Black Plastic Button Metal Frame

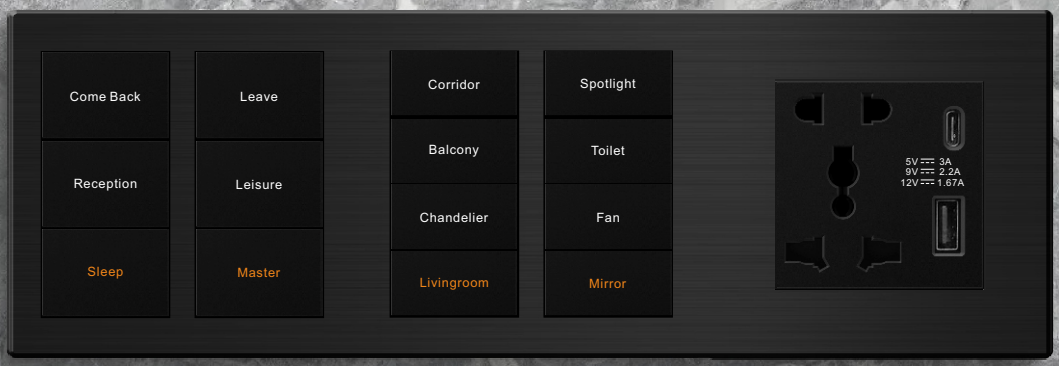





Brushed Grey Plastic Button Metal Frame







CNC Edge Finishing Process

Sensor-activated Backlight Function

Accurate Balance Technique

Tact Switch

Patented Backlight Technology

Multiple Color Options

Customized Button Graphics and Text

Multiple Material Options

Series	Types of Switches	Surface Material	Plastic Modular Color	Metal Modular Color	Product Dimensions (mm)	Input Voltage (V)	Installation Method (mm)	Conjoined	Protocol
ORA	CNC Edged Metal Tact Switch	Metal	Spray White Spray Grey Spray Black Spray Champagne Brushed Champagne (Code 2) Brushed Matte Black (Code 2	Spray White Spray Grey Spray Black Spray Champagne Brushed Champagne (Code 2) Brushed Matte Black (Code 2	86x86mm	24VDC	86mm Wall Box	1/2/3/4/5 Conjoined	KNX

EU STANDARD



Technical Specifications

1 Key Switch



General Information

Wiring Method:	KNX
Types of Switches:	Metal Tact Switch
Series:	ORA
Input Voltage:	24V DC
Terminal Port:	KNX
Installation Method:	86mm Wall Box
Changeable Backlight Function:	●
Touch Lifespan:	100,000 times
Product Features:	CNC Edge Convenient Overall Assembly Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)
Embedded Depth:	⩾15mm
Cojoined:	1/2/3/4/5 Conjoined

Precautions:

- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Technical Specifications

2 Key Switch



General Information

Wiring Method:	KNX
Types of Switches:	Metal Tact Switch
Series:	ORA
Input Voltage:	24V DC
Terminal Port:	KNX
Installation Method:	86mm Wall Box
Changeable Backlight Function:	●
Touch Lifespan:	100,000 times
Product Features:	CNC Edge Convenient Overall Assembly Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)
Embedded Depth:	⩾15mm
Cojoined:	1/2/3/4/5 Conjoined

Precautions:

- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Technical Specifications

3 Key Switch

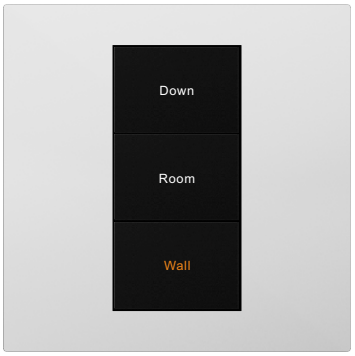

General Information

Wiring Method:	KNX
Types of Switches:	Metal Tact Switch
Series:	ORA
Input Voltage:	24V DC
Terminal Port:	KNX
Installation Method:	86mm Wall Box
Changeable Backlight Function:	●
Touch Lifespan:	100,000 times
Product Features:	CNC Edge Convenient Overall Assembly Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)
Embedded Depth:	⩾15mm
Cojoined:	1/2/3/4/5 Conjoined

Precautions:

- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Technical Specifications

2 Line 4 Key Switch

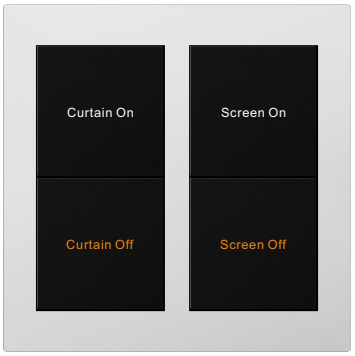

General Information

Wiring Method:	KNX
Types of Switches:	Metal Tact Switch
Series:	ORA
Input Voltage:	24V DC
Terminal Port:	KNX
Installation Method:	86mm Wall Box
Changeable Backlight Function:	●
Touch Lifespan:	100,000 times
Product Features:	CNC Edge Convenient Overall Assembly Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)
Embedded Depth:	⩾15mm
Cojoined:	1/2/3/4/5 Conjoined

Precautions:

- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Technical Specifications

2 Line 5 Key Switch

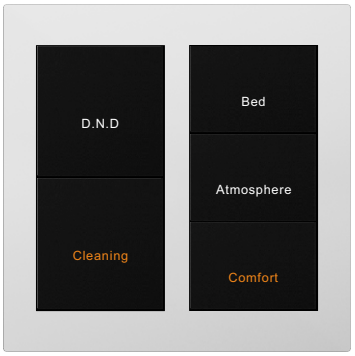

General Information

Wiring Method:	KNX
Types of Switches:	Metal Tact Switch
Series:	ORA
Input Voltage:	24V DC
Terminal Port:	KNX
Installation Method:	86mm Wall Box
Changeable Backlight Function:	●
Touch Lifespan:	100,000 times
Product Features:	CNC Edge Convenient Overall Assembly Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)
Embedded Depth:	⩾15mm
Cojoined:	1/2/3/4/5 Conjoined

Precautions:

- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Technical Specifications

2 Line 6 Key Switch

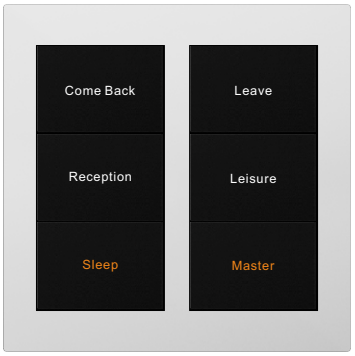

General Information

Wiring Method:	KNX
Types of Switches:	Metal Tact Switch
Series:	ORA
Input Voltage:	24V DC
Terminal Port:	KNX
Installation Method:	86mm Wall Box
Changeable Backlight Function:	●
Touch Lifespan:	100,000 times
Product Features:	CNC Edge Convenient Overall Assembly Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)
Embedded Depth:	⩾15mm
Cojoined:	1/2/3/4/5 Conjoined

Precautions:

- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Technical Specifications

2 Line 7 Key Switch

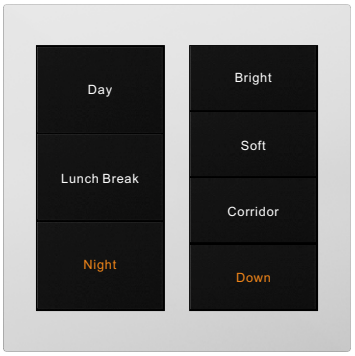

General Information

Wiring Method:	KNX
Types of Switches:	Metal Tact Switch
Series:	ORA
Input Voltage:	24V DC
Terminal Port:	KNX
Installation Method:	86mm Wall Box
Changeable Backlight Function:	●
Touch Lifespan:	100,000 times
Product Features:	CNC Edge Convenient Overall Assembly Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)
Embedded Depth:	⩾15mm
Cojoined:	1/2/3/4/5 Conjoined

Precautions:

- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.

Technical Specifications

2 Line 8 Key Switch



General Information

Wiring Method:	KNX
Types of Switches:	Metal Tact Switch
Series:	ORA
Input Voltage:	24V DC
Terminal Port:	KNX
Installation Method:	86mm Wall Box
Changeable Backlight Function:	●
Touch Lifespan:	100,000 times
Product Features:	CNC Edge Convenient Overall Assembly Multiple Color Options Sensor Backlight Function High Sensitivity Button Text Customization

Materials

Surface Materials:	Aluminum
Surface Treatment:	Spray/Brushed

Dimensions

Product Dimensions :	W:86 H:86 D:7mm (Excluding Base)
Embedded Depth:	⩾15mm
Cojoined:	1/2/3/4/5 Conjoined

Precautions:

- Must be installed or disassembled by a professional electrician;
- Do not operate with wet hands to prevent electric shock;
- Do not use it with short circuit or overload;
- Installation while powered on is strictly prohibited.